

### For More Information, or to Order:



www.UniLinkinc.com Sales@UniLinkinc.com 800.666.2980

IMAGE Capture Plus

# KV-S1065C / KV-S1046C Document Scanner

- 60 ppm / 120 ipm\* (KV-S1065C) 45 ppm / 90 ipm\* (KV-S1046C) \* Letter, Portrait, 200 dpi, Binary / Color
- Reliable paper feed mechanism
- Double-Feed Skip function
- Advanced image processing
- Mixed paper and hard card batch scanning
- Image Capture Plus technology ensures Automatic Image Orientation



For More Information, or to Order: **UniLink** www.UniLinkinc.com • 800.666.2980 • Sales@UniLinkinc.com

## A Compact Body Packed with Advanced Functions

Even with its compact body, the KV-S1065C / KV-S1046C has a fast scanning speed of 60 ppm\* (for the KV-S1065C) or 45 ppm\* (for the KV-S1046C). And it's capable of scanning a variety of documents, including long, small, thick and thin sheets. Normally complicated settings have been automated, and images that require re-scanning are automatically detected by hardware process to provide both easy use and fast scanning. This advanced document scanner will greatly boost the efficiency of your office.

\* Letter, Portrait, 200 dpi,

#### Reception

The KV-S1065C / KV-S1046C's small footprint allows it to conveniently fit into small spaces, such as reception counters. Placing it at the reception area of a bank or hospital allows customer or patient ID cards and other documents to be quickly scanned. This enables real-time information sharing to help provide fast, accurate service.





#### Office

The KV-S1065C / KV-S1046C can quickly convert a large number of documents into electronic data, so it provides smooth usage even in offices with many users. Scanning documents into data makes it possible to consolidate information, which improves work efficiency. And it lowers the cost of handling documents and reduces the space needed to store them.



## **Power Saving**


#### **LED** lighting

The scanning section uses LEDs for its light source to lower power consumption while scanning.



#### **Sleep mode**

Power consumption is suppressed to 1 watt maximum during sleep mode to save energy while the scanner is not being used.



#### **Power Auto Off function**

The power automatically turns off at a preset time to cut down on wasted electricity.\*

\* Approximately 0.3 W of electricity is consumed when the power is off.



## **Easy Maintenance**

The clamshell design allows full, easy access to the entire paper path, so you can clear paper jams, clean the unit, or replace a roller easily without having to call a service technician.



#### For More Information, or to Order: www.UniLinkinc.com • 800.666.2980 • Sales@UniLinkinc.com

Active Double-Feed Prevention Boller

## **Reliable Paper Feed Mechanism**


#### Accurate processing of documents with various thicknesses

The paper feed rollers rotate independently left and right to reduce document skewing during scanning. In addition, the Active Double-Feed Prevention Roller reverses rotation the instant that the leading document leaves the paper feed section to prevent the double-feeding of documents that are stuck together. These functions enable documents with thicknesses from 5.4 to 55 lbs.\* (20 to 209 g/m<sup>2</sup>) to be accurately transported at high scanning speeds of 60 ppm.\*\*

\* Weight of 500 sheets (17 x 22 in. / 432 x 559 mm). \*\* For the KV-S1065C only. Letter, Portrait, 200 dpi.

### **Document output control**

The output speed is automatically lowered for documents that are 5.82 inches or shorter, and the exit guides keep the document from slipping. This stops longer documents from sliding under shorter ones to prevent the output order from changing.



## Scanning of Various Documents

#### **Compound paper scanning**

A Double-Feed Prevention Roller release mechanism is provided. By lifting the manual feed selector, compound paper such as carbonless copy paper can also be fed.\*

\* When the Double-Feed Prevention Roller is released by the Manual Feed Selector, the Double-Feed Detection function must be cancelled by a software setting. When scanning a document manually, feed the document one set at a time.



Manual Feed

Compound paper being fed without releasing the Double-Feed Prevention Roller. Prevention Roller.


#### Mixed paper and hard card batch scanning These scanners were designed

These scanners were designed to be able to combine paper documents along with a hard ID card, such as a driver's license, in a single batch by using the mixed card batch guide. You can even scan embossed cards smoothly.



Double

feedina

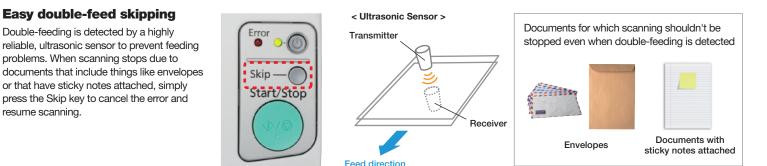

## **Advanced Image Processing**

**Double-Feed Skip Function** 

#### Improved scanning quality


The Automatic Brightness Adjustment function automatically adjusts the brightness and contrast of scanned images, even on documents with varying paper colors and text hues, to produce scanned images with suitable brightness. The Automatic Image Emphasis function emphasizes the edges of characters and lines to sharpen them and softens the appearance of other parts of the image. Noise (black spots) is also reduced.





#### **Missing image detection and prevention**

When a scanned image is missing due to an inadvertently folded corner (dog-ear) or a document that is extremely skewed, the Dog-Ear Detection function automatically and temporarily stops the scanning. The user can then decide to rescan, or to continue scanning as is.

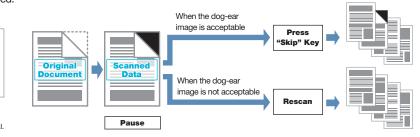

## A Wealth of Image Processing Functions from Image Capture Plus Software

#### Easy-to-use data formats

20110921-001

earch ile (\*bmp) e (\* jpe) File (\* jp2) ree Type(\* \*)

Select PDF (Searchable)

Images can be saved in various data formats, such as PDF, JPEG, TIFF and Bitmap. Scanned data can be moved and saved in a selected folder all at once. Plus, text-searchable PDF and searchable PDF/A data can be generated.

#### **Automatic Image Orientation**

Even when documents are set in different directions, this function detects the direction of the scanned text in documents and automatically rotates it into the correct direction \*

\* The orientation of documents with many characters using text decorations such as outlining, drop shadows, underlines, etc., may not be correct.

With this function




Without this function



When you use the OCR Zone function, text will be recognized while scanning and acquired as an OCR result that is used in the file name and Output Log.\* \* The Output Log is available only in Job Scan mode

IMAGE Capture Plus



## Dimensions

KV-S1065C / KV-S1046C

### KV-S1065C / KV-S1046C Specifications

rchable data is generated.

Scanning Face			Duplex
Scanning Method			Color CIS (600 dpi)
			Background: Black
Resolution			100 – 600 dpi (1 dpi step)
			Optical: 300 dpi / 600 dpi (Automatic switch)
Scanning Speed	Binary / Color	Simplex	KV-S1065C: Up to 60 ppm / KV-S1046C: Up to 45 ppm
	Letter size 200	dpi Duplex	KV-S1065C: Up to 120 ipm / KV-S1046C: Up to 90 ipm
Automatic Detection			Ultrasonic double-feed detection (1 position), Dog-ear detection
Compression			JPEG (color, grayscale)
Tonal Gradation			Binary, Grayscale, Color, MultiStream: Binary & Grayscale, Binary & Color
Binary Mode Halftone			Dither, Error diffusion
Image Control			Automatic Brightness Adjustment, Automatic Image Emphasis,
0			Multi Color Drop Out, Dynamic Threshold, White Level From Paper,
			Image Emphasis, Gamma Correction, Automatic Separation,
			Noise Reduction, Mirror Image, Monochrome Reversing and much more.
Other Functions			Length Control, Patchcode Detection (Type 2, 3, T), Control Sheet,
			Long Paper Mode, Double Feed Skip, Dog-ear Skip
Documents	Paper	Size	1.9 in. x 2.8 in. (48 mm x 70 mm) - 8.5 in. x 100 in. (216 mm x 2540 mm)
	. apoi	Thickness	1.6 mils - 7.9 mils (0.04 mm - 0.2 mm) Note: 1 mil = 0.001 in.
		Weight*1	5.4 lbs 55 lbs. (20 g/m <sup>2</sup> - 209 g/m <sup>2</sup> )
	Card	Size	3.4 in. x 2.1 in. (85.6 mm x 54 mm) (ISO 7810 ID-1)
	ould	Thickness	0.03 in. (0.76 mm)
Feed tray Capacity*1		11110111000	Up to 75 sheets (20 lbs., 80 g/m <sup>2</sup> ), 3 hard cards (ISO 7810 ID-1)
Supported Operating S	lystem		Windows <sup>®</sup> XP SP3 or later(32-bit), Windows Vista <sup>®</sup> SP2
Supported Operating System			or later( $32 / 64$ -bit), Windows <sup>®</sup> 7( $32 / 64$ -bit)
Interface			USB 2.0
External Dimensions (W x D x H)			12.5 in. x 8.2 in. x 7.7 in. (317 mm x 209 mm x 196 mm)
			(When the exit tray is closed and without the feed tray)
Weight			8.8 lbs. (4.0 kg)
Power Requirement			External power supply (AC adaptor)
rower nequirement			AC 100 V $-$ 240 V, 50 / 60 Hz
Power Consumption	Maximum (Scanning)		25 W
	Minimum (Standby)		8W
	Sleep mode		1.0 W or less
	When the power key is OFF		0.3 W or less (While the AC adaptor is connected to the AC outlet)
Operating Environment			59 °F − 86 °F (15 °C − 30 °C)
	Humidity		20 % RH - 80 % RH
Storage Environment	Temperature		32 °F – 104 °F (0 °C – 40 °C)
	· · · · ·		
-	Humidity		10 % RH – 80 % RH
Accessories	· · · · ·		CD-ROM:
Accessories	· · · · ·		CD-ROM: Device driver software, ISIS <sup>®</sup> driver software, TWAIN driver software,
Accessories	· · · · ·		CD-ROM: Device driver software, ISIS® driver software, TWAIN driver software, Image Capture Plus application software <sup>+2</sup> , User Utility software,
Accessories	· · · · ·		CD-ROM: Device driver software, ISIS <sup>®</sup> driver software, TWAIN driver software, Image Capture Plus application software <sup>*2</sup> , User Utility software, Installation manual, Operation manual, Control sheet
Accessories	· · · · ·		CD-ROM: Device driver software, ISIS <sup>®</sup> driver software, TWAIN driver software, Image Capture Plus application software <sup>*2</sup> , User Utility software, Installation manual, Operation manual, Control sheet Installation Manual, Feed Tray, Mixed batch card guide (Pre-installed),
	Humidity		CD-ROM: Device driver software, ISIS <sup>®</sup> driver software, TWAIN driver software, Image Capture Plus application software <sup>*2</sup> , User Utility software, Installation manual, Operation manual, Control sheet Installation Manual, Feed Tray, Mixed batch card guide (Pre-installed), AC adaptor & Power cord, USB cable
Consumables	Humidity Roller exchang		CD-ROM: Device driver software, ISIS® driver software, TWAIN driver software, Image Capture Plus application software <sup>*2</sup> , User Utility software, Installation manual, Operation manual, Control sheet Installation Manual, Feed Tray, Mixed batch card guide (Pre-installed), AC adaptor & Power cord, USB cable KV-SS058 (Double feed prevention roller x 1, Paper feed roller x 1)
	Humidity	paper	CD-ROM: Device driver software, ISIS <sup>®</sup> driver software, TWAIN driver software, Image Capture Plus application software <sup>*2</sup> , User Utility software, Installation manual, Operation manual, Control sheet Installation Manual, Feed Tray, Mixed batch card guide (Pre-installed), AC adaptor & Power cord, USB cable

#### Trademarks and registered trademarks

- ENERGY STAR and the ENERGY STAR mark are registered U.S. marks.

ABBYY and FineReader are registered trade marks of ABBYY Software House - ISIS is a registered trademark or trademark of EMC Corporation in the United States and other countries.

- Microsoft, Windows and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. - All other brand or product names are the property of their respective holders

Panasonic System Networks Company of America

#### 9.3 in. (237 mm) 7.7 in. (196 mm 8.2 in. (209 mm) 12.5 in (317 mm)







- \*1: "Weight in pounds" of paper represents the weight of 500 sheets (17 x 22 in. / 432 x 559 mm).
- \*2: The supported file types are PDF, PDF/A, Searchable PDF, Searchable PDF/A, JPEG, JPEG2000, TIFF and Bitmap. Searchable PDF and Searchable PDF/A documents can be created for English, French, German, Italian, Spanish, Brazilian Portuguese, Japanese, Korean, Simplified Chinese, and Traditional Chinese. Searchable PDF and Searchable PDF/A documents for Japanese, Korean, Simplified Chinese, and Traditional Chinese can be created when using Operating Systems of the respective languages.
- \*3:The KV-S1065C or KV-S1046C is required to operate the KV-SS080.

#### Important

- Safety Precaution: carefully read the operating instructions and installation manual before using this product.

- The scanning speed differs depending on the host computer. the operating system, the application, the measuring method, the quantity of data in the image, and the paper type. The scanning speed is as determined by Panasonic methods of speed measurement.
- . Dimensions and weights are approximate.
- Design and specifications are subject to change without notice.

**Document Management**