Model 35-3

CURRENCY COUNTERS

For More Information:



www.UniLinkinc.com 800.666.2980 Sales@UniLinkinc.com

Continually perfecting the simplicity and performance of premium currency counters.




MAGNER® Model 35-3

Proven Performance and Quality

Premium is defined by performance, not defined by size. The compact Model 35-3 represents the third generation in a family of outstanding price/performers, which also boasts the #1 selling table-top currency counter in the world. Along with its appealing appearance and simplicity of operation, the 35-3 offers robust functionality with automatic start, full error detection, adjustable speed, variable currency batching, and accumulation mode. At speeds up to 1500 notes per minute, basic currency counting applications can be performed with greater efficiency and optimum productivity. Designed from the beginning for superior reliability and dependability, the Model 35-3 is engineered to deliver MAGNER® quality performance for the long haul.

Our Currency Counters have evolved from years of experience and are backed by unmatched support through our network of MAGNER® Authorized Distributors Nationwide.

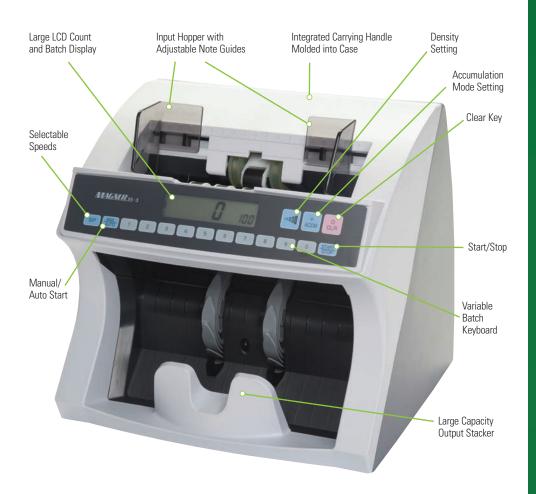

For More Information:



www.UniLinkinc.com 800.666.2980 Sales@UniLinkinc.com

MODEL 35-3 SPECIFICATIONS

Counting Speed

600, 1200, 1500 notes per minute (selectable)

Display Type: LCD

3 digit batch display 4 digit count display

Document Size Limits

1.97" x 3.35" to 4.33" x 7.28" 50 mm x 85 mm to 110 mm x 185 mm

Hopper Capacity

300 circulated notes

Stacker Capacity

200 circulated notes

Batching

Variable 1 to 999

Error Detection

Double, chain, half-note, jam, hopper jam, short count, note in stacker

Document Feed Mechanism

Friction, intermittent roller type

Dimensions

10.04" (H) x 11.02" (W) x 9.65" (D) 255 mm (H) x 280 mm (W) x 245 mm (D)

Net Weight

12.1 lbs (5.5 kg.)

Power Source

AC115V +/- 10%, 60/50Hz AC230V +/- 10%, 60/50Hz (switch selectable)

Power Consumption

40W (average)

Operating Temperature Limits

+32° F to +104° F (0° C to +40° C)

Density Setting

Adjustable, 5 levels

Other Standard Features

Integrated carrying handle Accumulation mode Automatic/Manual Start External thickness adjustment

Options

RS232 interface External display



Specifications are subject to change

MAGNER

